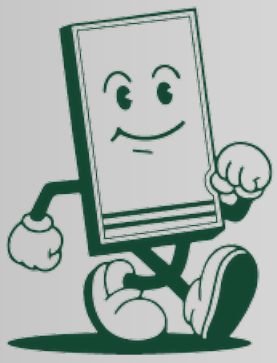

PARTITION PROS

Maintenance Guide

646-453-4564
info@thepartitionpros.com
www.thepartitionpros.com

hadrian™

STAINLESS STEEL & EMBOSSED STAINLESS STEEL
Metal Toilet Partitions

Maintenance Procedure

1.01 Stainless Steel & Embossed Stainless Steel

1 The best method of maintaining your high quality Hadrian Stainless Steel and Embossed Stainless Steel toilet partitions is frequent regular cleaning. Surfaces should be cleaned with a mild detergent or ammonia solution, rinsed with clear water (preferably warm/hot) and wiped dry. Never attempt to clean stainless steel with a steelwool cleaning pad, wire brush, or cleaning agents containing harsh abrasives.

2 If dirt build-up must be removed, use a metal cleaner specifically recommended for stainless steel. Deposits which require scouring may be removed with a mild abrasive powder such as the household cleaner, Ajax. Grease, oil and/or fingerprints may be removed with detergent and water, plus a solvent (i.e. acetone, kerosene, mineral spirits, etc.). Be sure to rub in the direction of the grain of the metal.

3 It is important to rinse stainless steel with clear water and wipe the surfaces with a soft cloth after cleaning to remove all traces of the cleaning agent. Again, rubbing and wiping should be done in the direction of the polished lines, not against them.

4 For any other assistance in maintaining the "bright look" of Stainless Steel and Embossed Stainless Steel toilet partitions, please call your local Hadrian representative.

5 If your partitions have a continuous hinge, regular application of an LPS II or an industrial type, non-drying lubricant is recommended.



Hadrian Manufacturing Inc., 965 Syscon Road, Burlington, ON, Canada, L7L 5S3 • Tel: (905) 333-0300 • Fax: (905) 333-1841
Hadrian Inc., 7420 Clover Avenue, Mentor, OH, U.S.A., 44060 • Tel: (440) 942-9118 • Fax: (440) 942-9618
www.hadrian-inc.com