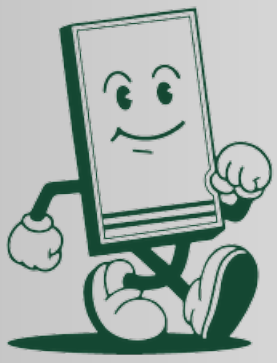

PARTITION PROS

Maintenance Guide

646-453-4564
info@thepartitionpros.com
www.thepartitionpros.com

hadrian®

SOLID PLASTIC
Toilet Partitions

Maintenance Procedure

1.01 Solid Plastic

Maintenance of your toilet partitions should be a part of your regular building preventive maintenance procedure.

1. Tighten any screws that have become loose due to vibrational forces or attempted vandalism.

2. Be sure the surfaces are dry after being cleaned and rinsed with clear water (when required).

3. Partitions exposed to severe humidity should be washed and dried as needed.

4. Periodically, remove any dirt, grime or foreign matter with a soft cloth.

5. Where surfaces reveal spotting resulting from hand perspiration, soil, or grease, a thorough cleaning with warm water and a mild detergent (i.e. Ivory Soap), followed by rinsing, and removal of excess moisture, will renew the clean even surface, providing a pleasant sanitary appearance. (Use of cleaning agents containing abrasives such as household cleaning powder, steel wool, and harsh detergents or acids ARE NOT RECOMMENDED).

6. For areas of stubborn graffiti, commercial graffiti removers can be used.

7. To maintain the brilliance of hardware, these components can be periodically improved by an application of non-abrasive cleaner with a damp cloth.

8. If your partitions have a continuous hinge, regular application of an LPS II or an industrial type, non-drying lubricant is recommended.

9. The appearance of scratches may be minimized by burnishing the blemish with a smooth, rounded object such as a spoon. For best results, apply slight pressure in a parallel motion to the scratch.



Hadrian Manufacturing Inc., 965 Syscon Road, Burlington, ON, Canada, L7L 5S3 • Tel: (905) 333-0300 • Fax: (905) 333-1841
Hadrian Inc., 7420 Clover Avenue, Mentor, OH, U.S.A., 44060 • Tel: (440) 942-9118 • Fax: (440) 942-9618
www.hadrian-inc.com